




AUTHORIZED AEROSPACE TOOLING & SERVICE CENTER

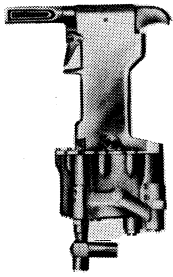


MODEL 350
1/8" through
3/16" rivet capacity

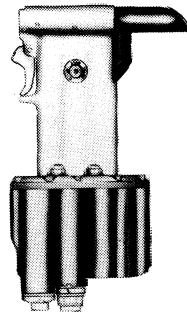

MODEL 352
5/32" through
1/4" bolt capacity

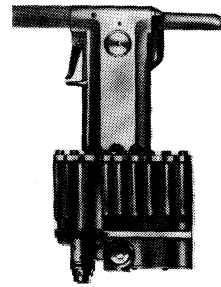

MODEL 353
3/16" through
3/8" bolt capacity

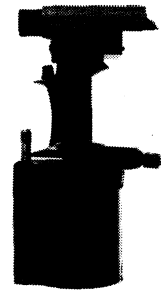


MODEL 200
1/8" through
1/4" rivet capacity
5/32" through
1/4" bolt cap.

MODEL 245
1/4"-through
5/16" bolt
capacity





NOSE ASSEMBLIES

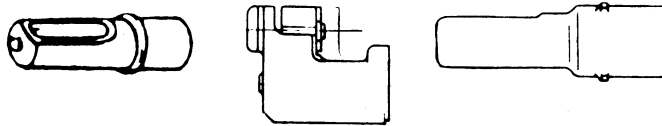

ALL SIZES AVAILABLE

MODEL 246
1/4" through
3/8" bolt
capacity

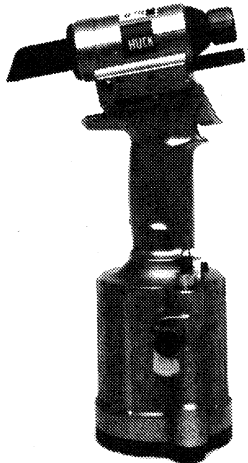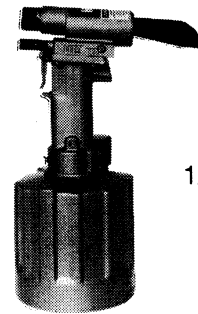

MODEL 244


Weighing in at less than 6 pounds the Huck Model 244 is the solution to operator fatigue and reduced productivity. The Model 244 was designed to install at high volumes lockbolt and blind fasteners through 1/4".

Nose Assemblies

| Fastener | Dia | Std. Inline |
|----------------------------------|--------------------|-------------|
| NAS Shear | 04 | 99-2651 |
| | 05 | 99-2549S |
| | 06 | 99-2555 |
| | 08 | 99-2561 |
| NAS Tension & S-Bolts | 05 | 99-2549T |
| | 06 | 99-2555 |
| | 08** | 99-2561** |
| GP Metric | 4mm | 99-2573 |
| | 5mm | 99-2579 |
| | 6mm | 99-2585 |
| LGP | 04 | 99-2654 |
| | 05 | 99-2501 |
| | 06 | 99-2507 |
| | 08 | 99-2513 |
| LGP Metric | 4mm | 99-2525 |
| | 5mm | 99-2531 |
| | 6mm | 99-2537 |
| LHP | 05 | 99-2501 |
| | 06 | 99-2507 |
| | 08 | 99-2513 |
| ASP | 06 | 99-2642 |
| | 08 | 99-2645 |
| | 10 | 99-2648 |
| | Blind Rivet | 04 |
| 05 | | 99-2731 |
| 06 | | 99-2737 |
| 08 | | 99-2743 |
| Blind Bolt | 05 | 99-2701 |
| | 06 | 99-2707 |
| | 08*** | 99-2713*** |

**Not including 08 S-Bolt titanium

***Not including 08 titanium

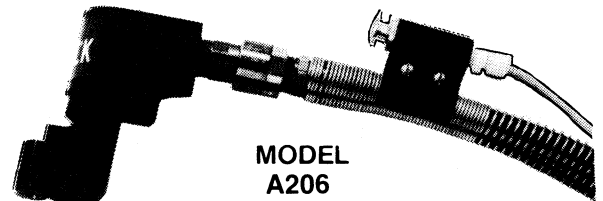

MODEL A206
3/16" rivet
and bolt
capacity



MODEL 942 POWER RIG
Hydraulic Units
Output Pressure
Pull 8,400 PSI Return 3,500 PSI



**Huck
Fasteners**

From Cordant Technologies